



SP 25

Paving width Inset	max. 3.5 m
Paving thickness Inset**	max. 400 mm
Engine power	118 kW / 158 HP / 160 PS
Operating weight, CE*	11,500 - 22,500 kg
Exhaust emission standard	EU Stage 3a / US EPA Tier 3



SP 25i

Paving width Inset	max. 3.5 m
Paving thickness Inset**	max. 400 mm
Engine power	115 kW / 154 HP / 156 PS
Operating weight, CE*	11,500 - 22,500 kg
Exhaust emission standard	EU Stage 5 / US EPA Tier 4f



SP 62

Paving width**	3.5 - 7.5 m
Paving thickness**	max. 450 mm
Engine power	155 kW / 208 HP / 211 PS
Operating weight, CE*	17,000 - 36,000 kg
Exhaust emission standard	EU Stage 3a / US EPA Tier 3




SP 62i***

Paving width**	3.5 - 7.5 m
Paving thickness**	max. 450 mm
Engine power	180 kW / 241 HP / 245 PS
Operating weight, CE*	17,000 - 36,000 kg
Exhaust emission standard	EU Stage 5 / US EPA Tier 4f

* Weight of machine, half weight of all consumables, machine operator (75 kg), on-board tool kit, no optional equipment; weights depend on the actual equipment installed and the working width

** Please consult factory for different offset geometries or special applications

*** Machine with different specifications also available for the North American market

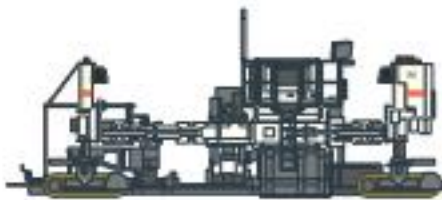**SP 64**

Paving width**	3.5 - 6.0 m (without DBI up to 7.5 m)
Paving thickness**	max. 450 mm
Engine power	155 kW / 208 HP / 211 PS
Operating weight, CE*	21,000 - 54,000 kg
Exhaust emission standard	EU Stage 3a / US EPA Tier 3

**SP 64i*****

Paving width**	3.5 - 6.0 m (without DBI up to 7.5 m)
Paving thickness**	max. 450 mm
Engine power	180 kW / 241 HP / 245 PS
Operating weight, CE*	21,000 - 54,000 kg
Exhaust emission standard	EU Stage 5 / US EPA Tier 4f

**SP 94**

Paving width**	3.5 - 9.5 m
Paving thickness**	max. 450 mm
Engine power	224 kW / 300 HP / 305 PS
Operating weight, CE*	30,500 - 75,000 kg
Exhaust emission standard	EU Stage 3a / US EPA Tier 3

**SP 94i*****

Paving width**	3.5 - 9.5 m
Paving thickness**	max. 450 mm
Engine power	231 kW / 310 HP / 314 PS
Operating weight, CE*	30,500 - 75,000 kg
Exhaust emission standard	EU Stage 5 / US EPA Tier 4f



SP 102i (USA only)

Paving width**	16 - 40 ft
Paving thickness**	max. 450 mm
Engine power	231 kW / 310 HP / 314 PS
Operating weight, CE*	25,500 - 51,000 kg
Exhaust emission standard	US EPA Tier 4f




SP 124

Paving width**	4.5 - 12.0 m
Paving thickness**	max. 450 mm
Engine power	272 kW / 365 HP / 370 PS
Operating weight, CE*	48,000 - 106,000 kg
Exhaust emission standard	EU Stage 3a / US EPA Tier 3



SP 124i***

Paving width**	4.5 - 12.0 m
Paving thickness**	max. 450 mm
Engine power	321 kW / 430 HP / 436 PS
Operating weight, CE*	48,000 - 106,000 kg
Exhaust emission standard	EU Stage 5 / US EPA Tier 4f

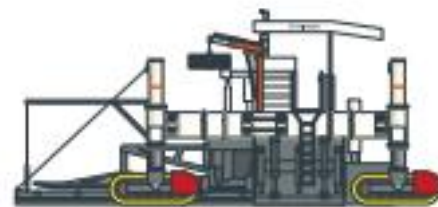

SP 154i

Paving width**	5.0 - 16.0 m
Paving thickness**	max. 450 mm
Engine power	321 kW / 430 HP / 436 PS
Operating weight, CE*	38,000 - 80,000 kg
Exhaust emission standard	EU Stage 5 / US EPA Tier 4f

* Weight of machine, half weight of all consumables, machine operator (75 kg), on-board tool kit, no optional equipment; weights depend on the actual equipment installed and the working width

** Please consult factory for different offset geometries or special applications

*** Machine with different specifications also available for the North American market



SP 164

Paving width**	5.0 - 16.0 m
Paving thickness**	max. 450 mm
Engine power	313 kW / 420 HP / 426 PS
Operating weight, CE*	48,000 - 155,000 kg
Exhaust emission standard	EU Stage 3a / US EPA Tier 3



SP 164i

Paving width**	5.0 - 16.0 m
Paving thickness**	max. 450 mm
Engine power	321 kW / 430 HP / 436 PS
Operating weight, CE*	48,000 - 155,000 kg
Exhaust emission standard	EU Stage 5 / US EPA Tier 4f