



**JLG**<sup>®</sup>

ELECTRIC- AND ENGINE-POWERED  
**SCISSOR LIFTS**

# WORLD-CLASS LINEUP

Every JLG Scissor Lift model has been designed, engineered and tested to deliver an uncompromising level of quality and safety. But when you use JLG, you'll have more under your feet than a firm platform. You'll also have access to an industry-renowned product support team ready to put your success above all.



## DAVINCI® ALL-ELECTRIC LIFT

The AE1932 is the industry's first, true all-electric scissor lift. Zero hydraulics for zero leaks, zero battery replacements, zero wasted time.

- + Powered by a single lithium-ion battery expected to last 10 years
- + Lifts a best-in-class 606-lb capacity up to 19-ft indoors and out



## ES SERIES

ELECTRIC-DRIVE SCISSORS

Get more done with the industry's best on-the-job performance with double the duty cycles of other electric scissor lifts.

- + Recipient of the 2021 Lowest Cost of Ownership Award™
- + Includes two of our most lightweight models, ideal for data centers and sensitive floors



## R SERIES

HYDRAULIC-DRIVE  
ELECTRIC SCISSORS

Engineered with fewer parts and compact dimensions, these lifts are built for reliability and ease of service on all types of job sites.

- + Value that goes beyond cost due to intuitive servicing and operation
- + All-steel platform and steel swing-out component doors




## ERT SERIES

ELECTRIC-DRIVE  
ROUGH-TERRAIN SCISSORS

Battery-powered with an electric drive and AC motor, this series brings improved efficiency and productivity to a wider range of job sites.

- + Industry-first control box with LCD display
- + Drive at full height capabilities

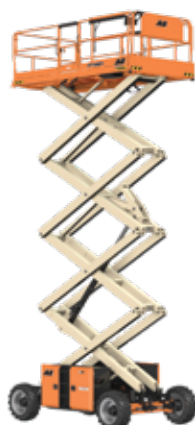

## RT SERIES

ENGINE-POWERED  
ROUGH-TERRAIN SCISSORS

Our most powerful scissor lifts are up to any task with platform heights up to 53-ft and carrying capacities up to 2,500-lbs.

- + Includes 69-in and 94-in wide models
- + Optional QuikLevel Advanced technology for working on sloped job sites available on select models

# SPECIFICATIONS

## R Series Electric Scissor Lifts

	PLATFORM HEIGHT (INDOOR/OUTDOOR)	PLATFORM CAPACITY (INDOOR/OUTDOOR)	PLATFORM SIZE <sup>2</sup>	# OCCUPANTS (INDOOR/ OUTDOOR)	MACHINE LENGTH	STOWED HEIGHT
<b>R1932<sup>1</sup></b>	19-ft / 19-ft / 5.8-m / 5.8-m	507-lb / 507-lb / 230-kg / 230-kg	65.5 x 30.3-in / 1.66 x .77-m	2 / 1	68.7-in / 1.74-m	82.8-in / 2.10-m
<b>R2632</b>	25-ft 5-in / 21-ft / 7.8-m / 6.4-m	507-lb / 275-lb / 230-kg / 125-kg	87.6 x 27.7-in / 2.22 x .70-m	2 / 1	94.3-in / 2.40-m	88.2-in / 2.24-m
<b>R2646</b>	26-ft / 26-ft / 7.92-m / 7.92-m	1,200-lb / 1,200-lb / 545-kg / 545-kg	87.6 x 41.5-in / 2.22 x 1.05-m	2 / 1	94.3-in / 2.40-m	89.6-in / 2.28-m
<b>R3246</b>	32-ft / 32-ft / 9.8-m / 9.8-m	705-lb / 507-lb / 320-kg / 230-kg	87.6 x 41.5-in / 2.22 x 1.05-m	2 / 1	94.3-in / 2.40-m	96.3-in / 2.45-m

## ES Lightweight Series Electric Scissor Lifts

<b>ES1330L</b>	13-ft / 3.8-m / 13-ft / 3.8-m	500-lb / 227-kg / 500-lb / 227-kg	52.8 x 27.6-in / 1.34 x .70-m	2 / 1	56.2-in / 1.4-m	71.7-in / 1.8-m
<b>ES1530L</b>	15-ft / 4.5-m / 10-ft / 3-m	500-lb / 227-kg / 500-lb / 227-kg	52.8 x 27.6-in / 1.34 x .70-m	1 / 1	56.2-in / 1.4-m	74.8-in / 1.9-m

## ES Series Electric Scissor Lifts

<b>ES1932<sup>1</sup></b>	19-ft / 19-ft / 5.8-m / 5.8-m	507-lb / 507-lb / 230-kg / 230-kg	65.5 x 30.3-in / 1.66 x .77-m	2 / 1	68.7-in / 1.74-m	82.8-in / 2.10-m
<b>ES2632</b>	25-ft 5-in / 21-ft / 7.8-m / 9.8-m	507-lb / 275-lb / 230-kg / 125-kg	87.6 x 27.7-in / 2.22 x .70-m	2 / 1	94.3-in / 2.4-m	88.2-in / 2.24-m
<b>ES2646</b>	26-ft / 26-ft / 7.92-m / 7.92-m	1,200-lb / 1,200-lb / 545-kg / 545-kg	87.6 x 41.5-in / 2.22 x 1.05-m	2 / 1	94.3-in / 2.4-m	89.6-in / 2.28-m
<b>ES3246</b>	32-ft / 32-ft / 9.8-m / 9.8-m	705-lb / 507-lb / 320-kg / 230-kg	87.6 x 41.5-in / 2.22 x 1.05-m	2 / 1	94.3-in / 2.4-m	96.3-in / 2.45-m
<b>ES4046</b>	39.1-ft / 11.9-m / 28-ft 8.5-in / 8.75-m	770-lb / 350-kg / 550-lb / 250-kg	97.9 x 37.6-in / 2.47 x .955-m	3 / 1	106.6-in / 2.7-m	99.5-in / 2.53-m

## DaVinci<sup>®</sup> All-Electric All Electric Scissor Lift

<b>AE1932</b>	19-ft / 5.79-m / 19-ft / 5.79-m	606-lb / 275-kg / 606-lb / 275-kg	65.5 x 29.1-in / 1.66 x .74-m	2 / 1	68.7-in / 1.74-m	83.2-in / 1.28-m
---------------	---------------------------------	-----------------------------------	-------------------------------	-------	------------------	------------------

## ERT Series Electric Scissor Lifts

<b>ERT2669</b>	26-ft 2-in / 7.98-m / 26-ft 2-in / 7.98-m	1,500-lb / 680-kg / 1,500-lb / 680-kg	130.50 x 63-in / 3.30 x 1.60-m	4 / 4	139-in / 3.53-m	96.7-in / 2.46-m
<b>ERT3369</b>	32-ft 8-in / 9.96-m / 32-ft 8-in / 9.96-m	1,000-lb / 454-kg / 1,000-lb / 454-kg	130.50 x 63-in / 3.30 x 1.60-m	4 / 2	139-in / 3.53-m	102.9-in / 2.61-m
<b>ERT4069</b>	40-ft 3-in / 12.3-m / 40-ft 3-in / 12.3-m	800-lb / 363-kg / 800-lb / 363-kg	130.50 x 63-in / 3.30 x 1.60-m	3 / 2	139-in / 3.53-m	103-in / 2.62-m
<b>ERT4769</b>	47-ft / 14.3-m / 47-ft / 14.3-m	800-lb / 363-kg / 800-lb / 363-kg	130.50 x 63-in / 3.30 x 1.60-m	3 / 2	139-in / 3.53-m	109.1-in / 2.77-m

## 69-in RT Series Engine-Powered Scissor Lifts

<b>RT2669</b>	26-ft 2-in / 7.98-m / 26-ft 2-in / 7.98-m	1,500-lb / 680-kg / 1,500-lb / 680-kg	130.50 x 63-in / 3.30 x 1.60-m	4 / 4	139-in / 3.53-m	96.7-in / 2.46-m
<b>RT3369</b>	32-ft 8-in / 9.96-m / 32-ft 8-in / 9.96-m	1,000-lb / 454-kg / 1,000-lb / 454-kg	130.50 x 63-in / 3.30 x 1.60-m	4 / 2	139-in / 3.53-m	102.9-in / 2.61-m
<b>RT4069</b>	40-ft 3-in / 12.3-m / 40-ft 3-in / 12.3-m	800-lb / 363-kg / 800-lb / 363-kg	130.50 x 63-in / 3.30 x 1.60-m	3 / 2	139-in / 3.53-m	103-in / 2.62-m
<b>RT4769</b>	47-ft / 14.3-m / 47-ft / 14.3-m	800-lb / 363-kg / 800-lb / 363-kg	130.50 x 63-in / 3.30 x 1.60-m	3 / 2	139-in / 3.53-m	109.1-in / 2.77-m

## 94-in RT Series Engine-Powered Scissor Lifts

<b>RT3394</b>	33-ft / 10.06-m / 33-ft / 10.06-m	2,250-lb / 1020-kg / 2,250-lb / 1020-kg	149.8 x 70.5-in / 3.8 x 1.8-m	6 / 6	192-in / 4.90-m	109-in / 2.80-m
<b>RT4394</b>	43-ft / 13.11-m / 43-ft / 13.11-m	1,500-lb / 680-kg / 1,500-lb / 680-kg	149.8 x 70.5-in / 3.8 x 1.8-m	6 / 6	192-in / 4.90-m	118-in / 3.00-m
<b>RT5394</b>	53-ft / 16.50-m / 53-ft / 16.50-m	1,500-lb / 680-kg / 1,500-lb / 680-kg	149.8 x 70.5-in / 3.8 x 1.8-m	6 / 6	192-in / 4.90-m	125-in / 3.20-m

<sup>1</sup>Indoor-only models R1932i and ES1932i available; consult factory.

<sup>2</sup>Dimensions reflect outside measurements on R, ES, AE models; inside measurements on ERT and RT models.

<sup>3</sup>Certain options or country standards may increase weight.

<sup>4</sup>Not all accessories and options can be outfitted on all models.



OVERALL WIDTH	MAX RATED WIND SPEED	TILT RATING—SIDE TO SIDE (INDOOR/OUTDOOR)	TILT RATING—FORE AND AFT	WEIGHT <sup>3</sup>	POWER SOURCE (E=ELECTRIC/D=DIESEL/DF=DUAL FUEL)	KEY ACCESSORIES AND OPTIONS <sup>4</sup>
32-in / 81-cm	28 mph / 12.5 km/h	1.75 Degrees / 1.50 Degrees	3.75 Degrees	3,450-lb / 1,564-kg	E: 4 x 6V / 220 amp-hr	<ul style="list-style-type: none"> <li>Additional Batteries</li> <li>Eagle Battery Charger</li> <li>Electrician's Tree</li> <li>Panel Carrier</li> <li>Pipe Racks</li> <li>QuickAccess Platform (R1932 Only)</li> </ul>
32-in / 81-cm	28 mph / 12.5 km/h	1.50 Degrees / 1.50 Degrees	3.50 Degrees	4,280-lb / 1,941-kg	E: 4 x 6V / 220 amp-hr	<ul style="list-style-type: none"> <li>QuikFold Rails (R1932 Only)</li> <li>SkySense Enhanced Detection System</li> <li>USB Charger and Phone Holster</li> <li>Workstation</li> </ul>
46-in / 1.17-m	28 mph / 12.5 km/h	2.50 Degrees / 1.50 Degrees	3.50 Degrees	5,267-lb / 2,389-kg	E: 4 x 6V / 220 amp-hr	
46-in / 1.17-m	28 mph / 12.5 km/h	2.50 Degrees / 1.50 Degrees	3.50 Degrees	5,410-lb / 2,454-kg	E: 4 x 6V / 220 amp-hr	
30-in / 76-cm	28 mph / 12.5 km/h	1.75 Degrees / 1.50 Degrees	3.00 Degrees	1984-lb / 900-kg	E: 2 x 12V / 105 amp-hr	
30-in / 76-cm	28 mph / 12.5 km/h	2.50 Degrees / 1.50 Degrees	3.00 Degrees	1940-lb / 880-kg	E: 2 x 12V / 105 amp-hr	
32-in / 81-cm	28 mph / 12.5 km/h	1.75 Degrees / 1.50 Degrees	3.75 Degrees	3,450-lb / 1,565-kg	E: 4 x 6V / 220 amp-hr	<ul style="list-style-type: none"> <li>Additional Batteries</li> <li>CleanGuard Leak Containment System</li> <li>Eagle Battery Charger</li> <li>Electrician's Tree</li> <li>Panel Carrier</li> </ul>
32-in / 81-cm	28 mph / 12.5 km/h	1.50 Degrees / 1.50 Degrees	3.50 Degrees	4,400-lb / 1,996-kg	E: 4 x 6V / 220 amp-hr	<ul style="list-style-type: none"> <li>Pipe Racks</li> <li>QuickAccess Platform (E51932 Only)</li> <li>SkySense Enhanced Detection System</li> <li>Workstation</li> </ul>
46-in / 1.17-m	28 mph / 12.5 km/h	2.50 Degrees / 1.50 Degrees	3.50 Degrees	5,295-lb / 2,401-kg	E: 4 x 6V / 220 amp-hr	
46-in / 1.17-m	28 mph / 12.5 km/h	2.50 Degrees / 1.50 Degrees	3.50 Degrees	5,650-lb / 2,549-kg	E: 4 x 6V / 220 amp-hr	
46-in / 1.17-m	28 mph / 12.5 km/h	1.50 Degrees / 1.50 Degrees	3.50 Degrees	6,230-lb / 2,826-kg	E: 4 x 6V / 255 amp-hr	
32-in / 81-cm	28 mph / 12.5 km/h	1.75 Degrees / 1.50 Degrees	3.75 Degrees	3,475-lb / 1,576-kg	E: Single 24V Lithium Ion, 80 amp-hr	<ul style="list-style-type: none"> <li>900W Battery Charger</li> <li>Dual Flashing Amber Beacons</li> <li>Panel Carrier</li> </ul>
						<ul style="list-style-type: none"> <li>Platform Control Box with LCD Display</li> <li>QuickAccess Platform</li> <li>SkySense Enhanced Detection System</li> </ul>
69.3-in / 1.76-m	28 mph / 12.5 km/h	2.50 Degrees	3.00 Degrees	8,250-lb / 3,750-kg	E: 8 x 6V / 225 amp-hr	<ul style="list-style-type: none"> <li>Additional Batteries</li> <li>Additional Tires</li> <li>CleanGuard Leak Containment System</li> <li>Heavy Duty Pipe Racks</li> </ul>
69.3-in / 1.76-m	28 mph / 12.5 km/h	2.50 Degrees	3.00 Degrees	9,425-lb / 4,284-kg	E: 8 x 6V / 225 amp-hr	<ul style="list-style-type: none"> <li>Hydraulic Leveling Jacks</li> <li>Onboard Generator</li> <li>Pipe Racks</li> <li>Panel Carrier</li> <li>Workstation</li> </ul>
69.3-in / 1.76-m	28 mph / 12.5 km/h	2.50 Degrees	3.00 Degrees	10,558-lb / 4,799-kg	E: 8 x 6V / 310 amp-hr	
69.3-in / 1.76-m	28 mph / 12.5 km/h	2.50 Degrees	3.00 Degrees	15,200-lb / 6,909-kg	E: 8 x 6V / 375 amp-hr	
69.3-in / 1.76-m	28 mph / 12.5 km/h	2.50 Degrees	3.00 Degrees	8,090-lb / 3,726-kg	D: Kubota 24.8 hp / 18.5 kW / DF: Kubota 31 hp / 23 kW	<ul style="list-style-type: none"> <li>2500W Generator</li> <li>Additional Batteries</li> <li>Additional Tires</li> <li>Aluminum Propane Tank, 33.5-lb</li> <li>CleanGuard Leak Containment System</li> </ul>
69.3-in / 1.76-m	28 mph / 12.5 km/h	2.50 Degrees	3.00 Degrees	9,080-lb / 4,127-kg	D: Kubota 24.8 hp / 18.5 kW / DF: Kubota 31 hp / 23 kW	<ul style="list-style-type: none"> <li>Heavy Duty Pipe Racks</li> <li>Hydraulic Leveling Jacks</li> <li>Hydraulic Oil Cooler (Excludes RT4769)</li> <li>QuikLevel Advanced</li> </ul>
69.3-in / 1.76-m	28 mph / 12.5 km/h	2.50 Degrees	3.00 Degrees	10,540-lb / 4,791-kg	D: Kubota 24.8 hp / 18.5 kW / DF: Kubota 31 hp / 23 kW	
69.3-in / 1.76-m	28 mph / 12.5 km/h	2.50 Degrees	3.00 Degrees	15,000-lb / 6,818-kg	D: Kubota 24.8 hp / 18.5 kW / DF: Kubota 31 hp / 23 kW	
93-in / 2.36-m	28 mph / 12.5 km/h	3.00 Degrees	5.00 Degrees	11,820-lb / 5,372-kg	D: Kubota 24.8 hp / 18.5 kW / DF: Kubota 31 hp / 23 kW	<ul style="list-style-type: none"> <li>Additional Tires</li> <li>Cold Weather Package</li> <li>Hydraulic Leveling Jacks</li> <li>Hydraulic Oil Cooler</li> <li>Large Material Rack</li> </ul>
93-in / 2.36-m	28 mph / 12.5 km/h	3.00 Degrees	5.00 Degrees	15,210-lb / 6,914-kg	D: Kubota 24.8 hp / 18.5 kW / DF: Kubota 31 hp / 23 kW	<ul style="list-style-type: none"> <li>Light Packages</li> <li>Pipe Racks</li> <li>SkyPower Package</li> <li>SkyPower with SkyWelder Package</li> </ul>
91-in / 2.31-m	28 mph / 12.5 km/h	1.50 Degrees	1.50 Degrees	17,110-lb / 7,761-kg	D: Kubota 24.8 hp / 18.5 kW / DF: Kubota 31 hp / 23 kW	



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.